



On	SW 4	Reverse Direction of Lid Buttons
	SW 5	Reverse Direction of Motor
Off	SW 6	Transmitter Program Button
	SW 7	On = Impulse Up / Deadman Down Off = Impulse Up / Down

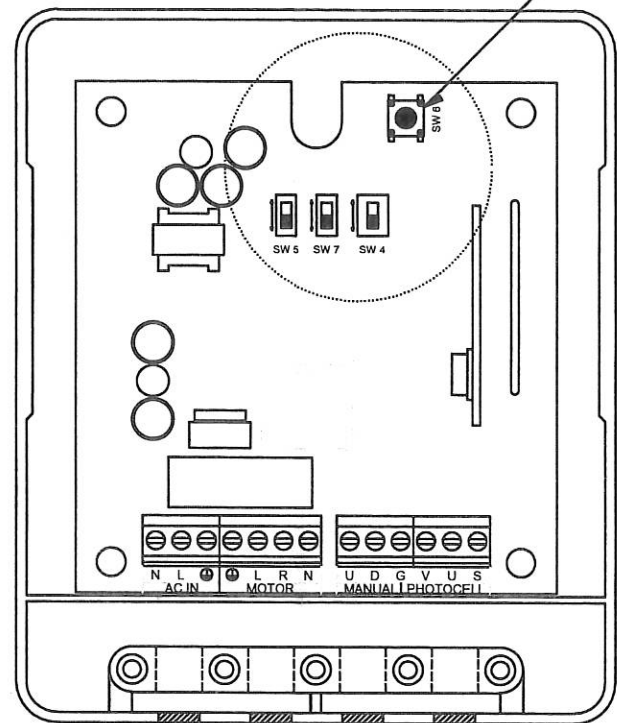

Specification	
Power Supply	200 - 240V AC, 50Hz
Operating Temp	-10 to + 55°C
Frequency	433MHz
Max Transmitters	100
Transmitter Distance	>30m
Max Power	500W


Transmitter

- Press program button SW6 until GREEN LED starts to flash then release
- Press **UP** button on transmitter device GREEN LED flashes quickly then goes out





Standard Transmitter supplied with unit

Battery Replacement - Standard Transmitter

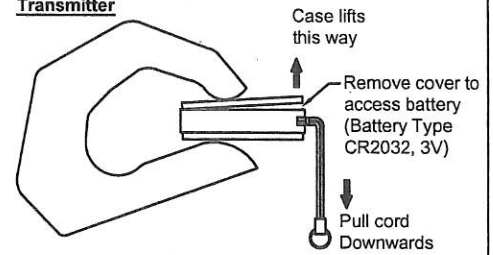

Deleting Receiver memory

- Press and hold Prog button SW6 - Green LED flashes slowly
- Continue to hold until (approx. 5 sec) Green LED flashes quickly then release
- Within 5 seconds press Prog Button SW6 once
- Green LED goes out
- Total erasure complete

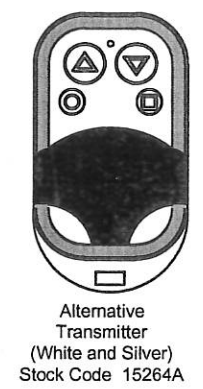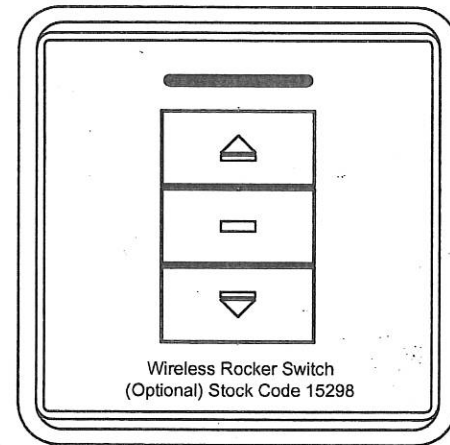

This drawing is the property of ELLARD LTD, it may not be reproduced without the written authorization of Ellard Limited. All intellectual property rights are expressly reserved

Revision Notes:

Ellard
 Ellard House
 Floats Road
 Roundthorn Industrial Estate
 Wythenshawe, Manchester
 M23 9WB
 Tel: 0161 945 4561
 Fax: 0161 945 4566

Title
 GENERAL DETAIL, CONNECTION
 AND SET UP
 (Page 1 of 2)

Date	08/11/2018
Drawn by	D. England
Chk'd by	J. Monks
Drq #	elec/GENESIS/misc/001 (Rev 1)

Rev 1
 Instructions amended to show standard supplied transmitter and battery change access to transmitter
 21/01/2019